


480 Tube Diameter - 48.3mm

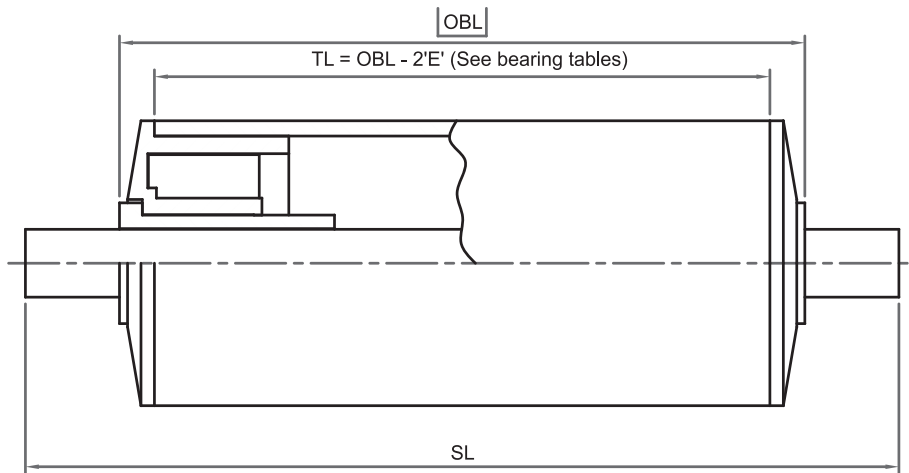

Tube		Bearings		Shaft Materials	
Materials	Standard - 48.3 x 2.8 White Dyno-pipe 483	Materials	Bushed type	Materials	Mild steel
			White ABS housing		Stainless steel
White acetal bush up to 10mm					
Black nylon bush over 10mm					
Blind bushes - see bearing tables					
			Size		Standard - Ø8, Ø9.5mm Option - Ø6, Ø10, Ø11, Ø12mm
			Type		Standard - SP Options - DL, F, L, MT

- Load Rating kg (Minimum applies).

Roller Length (mm)	Tube Material Dynopipe	Shaft			
		Ø6mm	Ø8mm	Ø10mm	Ø12mm
100	30	30	30	30	30
200	30	20	30	30	30
300	30	10	30	30	30
400	28	2	25	30	30
500	16	1	20	30	30
600	12		15	30	30
700	5		10	30	30
800	3			25	30
900	2			20	30
1000	1			10	30
1100					30
1200					30

* Shaded sizes not recommended

- Rated speed 20m/min (speed can be increased with decreased load).
- Max. static load 30kg.
- For central point load, reduce load rating by 1/3.
- Common uses;
 - General purpose gravity rollers.
 - Belt supports.
 - Food factories.
 - Fruit handling elevators